

ZüM eco-Set™

USB/DECT 6.0 Ultra Low Emissions
Headset and Base Station




Lowest Possible Level of Emissions



USER GUIDE
English Only

Telephone/USB Base Station


1. Battery Indicator
2. Mac/PC button
3. Telephone (TEL) button
4. Online indicator
5. USB connector (computer port)
6. Power socket
7. EHS port
8. Telephone connector ('Tel' port)
9. Handset connector
10. EHS Selection switch
11. Microphone volume up/down
12. Wiring switch

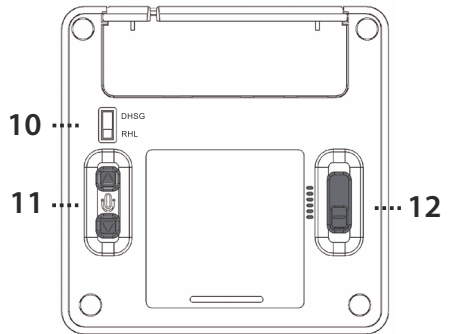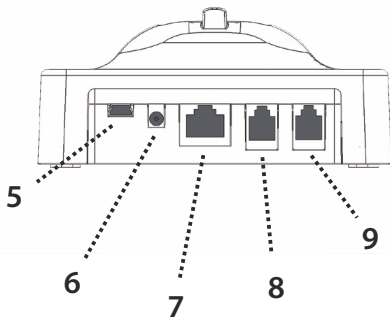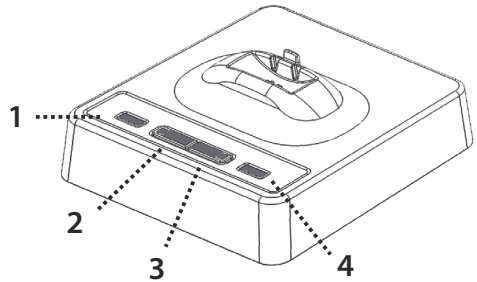

ZuM eco-Set™

USB/DECT 6.0 Ultra Low Emissions Headset and Base Station

1. Receive volume up/down
2. Mute
3. Headset ON/OFF
4. Noise cancelling boom microphone
5. Replaceable earplug
6. Battery

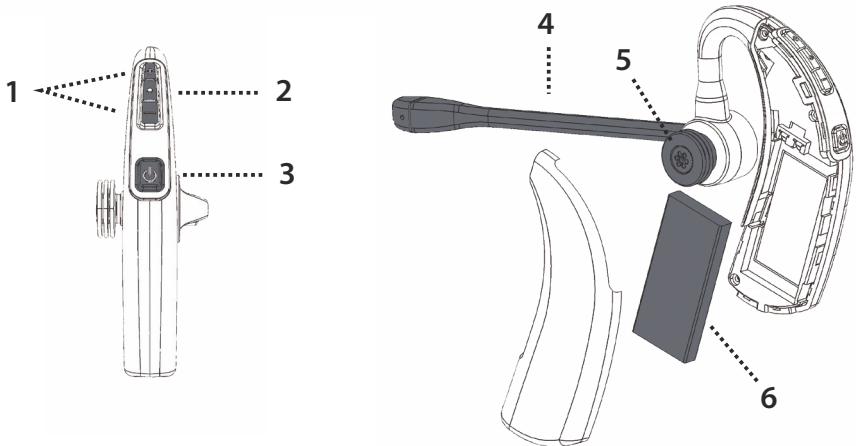

Contents:

1. Product description	4
2. Setup	5
2.1 Connecting to a telephone or terminal with a headset port.....	5
2.2 Connection to a telephone or terminal without a headset port	5
2.3 Connecting to a compatible handset lifter (refer to your supplier).....	5
2.4 Connecting EHS with DHSG protocols (refer to your supplier)	6
2.5 Connecting to a computer USB port	6
2.6 Replacing the earplugs	6
3. Operation	6
3.1 Making and receiving calls	6
3.1.1 Making an outgoing call in telephone mode.....	6
3.1.2 Receiving an incoming call in telephone mode	7
3.1.3 Making an outgoing call in VoIP mode.....	7
3.2 Adjusting the ring volume.....	7
3.3 Muting the headset microphone.....	7
3.4 Headset transmitting volume setting.....	7
3.5 Adjusting headset receive volume.....	8
3.6 Out of range and reconnection	8
3.7 Battery level indication.....	8
3.8 Making a conference call	8
3.9 Registering headsets to the base.....	9
3.10 Using multiple headsets.....	9
3.11 Using ZuM eco-Set™ for call recording	10
3.12 Using ZuM eco-Set™ with Skype for Business™ (Lync™).....	10
3.13 Switching Auto Pickup Mode On and Off	10
3.14 Overview of audio signals	10
4. Troubleshooting	11

1. Product Description

Stand up. Walk around. Get a cup of coffee.

The ZuM eco-Set™ is a fully wireless headset solution offering you the ability to work "handsfree" with true wireless mobility.

Main features:

- DECT wireless headset solution
- Universal headset base
- Up to 9 hours talk time without recharging
- Eco-Low Radiation DECT with dynamic power adjustment
- Auxiliary port for connecting handset lifter or electronic hookswitch device
- Noise cancelling microphone for reduced background noise
- Secure high quality audio
- Receive volume control on headset
- Mute button on headset
- Talk button with LED on headset
- Magnetic charging unit
- Operating Range up to 1300 ft (400m)
- "Out of range" warning
- DECT 6.0/GAP compatible
- DHSG protocol
- Mac/PC* USB connectivity
- Three way conferencing by connecting an additional headset

** Will connect to Apple Mac OS X, or PC running Windows XP, Windows Vista, Windows 7, 8 & 10.*

2. Setup

Connect the power adaptor supplied with ZuM eco-Set™ to the Base Unit. The Base Unit's power LED will light up.

NOTE: Before you use your headset for the first time, we recommend you charge the headset for a minimum of 4 hours.

2.1 Connecting to a telephone or terminal with a headset port

- Using the headset cord supplied with the product, connect one end to the "Tel" port on Headset Base, and the other to the headset port on your telephone.
- Use the power adaptor supplied with the product to connect the headset base to a power outlet.
- You may need to adjust the wiring switch located on the bottom of the Headset Base to find the correct wiring for your device.

2.2 Connecting to a telephone or terminal without a headset port

- Using the headset cord supplied with the product, connect the "Tel" port on Headset Base with the "handset" port on your telephone.
- Connect the telephone handset cord to the handset port on the Headset Base.
- Use the power adaptor supplied with the product to connect the Headset Base to a power outlet.
- You may need to adjust the wiring switch located on the bottom of the headset base to find the correct wiring for your device.

2.3 Connecting to a compatible Handset Lifter (refer to the Lifter's User Guide)

- Fit the handset lifter to your telephone as indicated in its user guide.
- Connect the handset lifter to the "AUX" port located on the back of the Headset Base.
- Ensure that the EHS selection switch is set to "RHL".

2.4 Connecting EHS with DHSG protocols (refer to the unit's User Guide)

- Connect the DHSG cable to your telephone as indicated in its user guide.
- Connect the DHSG cable to the "AUX" and "Tel" ports located on the back of the headset base.
- Ensure that the EHS selection switch is set to "DHSG".

With the handset lifter or DHSG cable connected, you will be able to answer and end calls using the button located on the headset while away from your desk.

2.5 Connecting to a computer USB port

- Connect the USB cable supplied with the product to the "USB" port on the back of the headset base and to an available USB port on your computer.
- The computer should automatically recognize the device and install the correct drivers. Wait a few seconds before using the ZuM eco-Set™ headset.

2.6 Replacing the earplugs

To replace the earplug of the ZuM eco-Set™ over-the ear headset, twist the earplug 90 degrees and pull the earplug towards you.

3. Operation

3.1 Making and Receiving Calls

3.1.1 Making an outgoing call in Telephone mode

- Ensure that the "TEL" button on top of the headset base is selected.
- Lift the headset from the base to start a call. If you are already wearing the headset, press the headset's "ON/OFF" button. The base's "Online Indicator" LED will light. If a handset Lifter or Electronic Hookswitch device is connected to the headset base, the line will be active and you will hear a dial tone. Otherwise, you will also need to activate the Headset port via your desktop telephone.
- Dial the telephone number on the telephone's dial pad.
- After finishing the call, replace the headset on the base or press the ON/OFF button to disconnect. The "Online Indicator" LED will turn off.

3. Operation con't

3.1.2 Receive an incoming call in Telephone mode.

- If there is an incoming call from the telephone line and the headset base is connected to a handset lifter or Electronic Hook Switch device, the "TEL" LED and "headset" LED will flash; a ring tone will also be heard on the headset.
- Lift the headset from the base to answer the call. If you are already wearing the headset press the headset's "ON/OFF" button. The base's "Online Indicator" LED will light. If a handset Lifter or Electronic Hookswitch device is connected to the headset base, the line will be active. Otherwise, you will also need to activate the headset port via your desktop telephone.
- To end the call, replace the headset on the base or press the headset ON/OFF button.

3.1.3 Making an outgoing call in USB/PC mode

- Ensure that the "PC" button on top of the headset base is selected.
- Lift the headset from the base or press the headset's ON/OFF button if you are already wearing it, and the base's "Online Indicator" LED will light.
- After finishing your call, press the ON/OFF button to disconnect. The base's "Online Indicator" LED will turn off.

3.2 Adjusting the Ringer Volume

When the headset is ringing to indicate an incoming call, you can adjust the ring volume using the volume control buttons located on the headset.

3.3 Muting the Headset Microphone

To mute the headset microphone when on a call, press the 'Mute' button on the headset.

While the headset is in Mute mode, a short beep will be heard on the headset every 8 seconds. Press the 'Mute' button again to release the mute.

3.4 Headset transmitting volume setting

You can adjust the transmit volume of the headset by using the two buttons located on the bottom of the headset base.

3.5 Adjusting Headset Receive Volume

Use the volume control buttons on the headset to adjust the receive volume on your headset. You will hear a beep sound for each volume step Up or Down.

3.6 Out of range and reconnection

You will hear a warning tone in the headset when you walk out of range of the base. The headset will be disconnected from the base and the call will be automatically placed on hold. If you move back inside the range of the base the headset will automatically reconnect and the call will be active again. NOTE: If you do not move back inside the base range within 5 minutes the call will be disconnected.

3.7 Battery Level Indication

The four LED's (8) on the top of the headset base indicate the battery level of your headset.

Indication	Battery level
One LED flashing	< 20%
One LED on	20%-40%
Two LEDs on	40%-60%
Three LEDs on	60%-80%
Four LEDs on	80%-100%

3.8 Making A Conference Call

Your ZuM eco-Set™ headset allows for a second headset to be temporarily connected to the base so that you can have a three way conference call.

- Setup the call using the primary headset unit.
- Once on the call, place the second DECT headset unit on the base charger.
- After one second, the "Online Indicator" LED of the new headset will turn on and the base "Online indicator" LED will flash to indicate the headset is registering with base unit.
- Once the registering has completed, the base "Online Indicator" LED will stop flashing and the additional headset LED will flash.
- Once the registration has completed, a confirmation sound will be heard on the primary headset.
- Lift the additional headset from the base and it will enter talk mode.

NOTE: The additional headset will only remain registered to the base for the duration of the call. After the primary headset has ended the call, the unit will return to its normal state. The ZuM eco-Set™ headset also allows you to make a conference call between your normal phone and a computer. To activate this option hold down the PC/USB button on the base for four seconds. The LEDs of the PC/USB and TEL buttons will light. If one of the buttons is touched again this function will be turned off and the headset will return to the mode of the button pressed.

3.9 Registering headsets to the base

Up to three headsets can be registered permanently to the base. You can register a new headset unit to your base using the following procedure.

- Press and hold the 'TEL' or 'Registration' button on the headset base for five seconds to enter the registration mode. The 'TEL' LED will flash to indicate it is now in registration mode.
- Press and hold the 'Headset ON/OFF' button on the headset for five seconds for the headset to enter registration mode.
- The headset will now be registered to the base; this will take around 30 seconds. When the registration has completed, the base 'TEL' LED will stop flashing.

The additional 2 auxiliary headsets can be registered using the same procedure but instead of the 'TEL' button, use the microphone 'Up' button for headset 2 and the microphone 'Down' button for headset 3. These can be found on the underside of the headset base.

3.10 Using multiple headsets

If you have more than one headset registered to the base, the first headset to be turned on becomes the primary headset and takes control of the base. Another headset can then join and leave the call by the user pressing their headset buttons, but only the primary headset can end the call.

NOTE: Only one of the two additional headsets can connect at any one time.

3.11 Using the ZuM eco-Set™ for call recording

You can record calls while using ZuM eco-Set™ in the USB conference mode (see section 3.8) using voice recording software on your computer, PC or Mac.

3.12 Using ZuM eco-Set™ with Skype for Business (Microsoft Lync)

When your ZuM eco-Set™ is connected to a computer using the USB cable, it will interact with Skype for Business communication software installed on your PC or Mac. The headset button can be used to answer and end a Skype for Business call, and if you activate and finish a call using the desktop software, the headset will automatically turn on and turn off. This function can be enabled or disabled as follows:

- To enable MS Lync/Skype For Business - Press USB and microphone '+' buttons together for 3 seconds. The USB LED will flash twice (fast) 6 times to confirm the function is enabled.
 - To disable MS Lync/Skype For Business - Press USB and microphone '-' buttons together for 3 seconds. The USB LED will flash 6 times to confirm the function is disabled.
- The default setting is MS Lync/Skype For Business enabled.

3.13 Switching Auto Pickup Mode ON and OFF (Default setting is Auto Answer OFF)

On the Zum Eco Set headset the auto answer can be toggled on and off by pressing the headset Volume Up and Volume Down buttons together for 3 seconds.

- LED will flash slowly to show Auto Answer ON
- LED will flash quickly to show Auto Answer OFF

3.14 Overview of audio signals

Action	Audio confirmation
Low battery	2 rapid beeps (60 sec repeat)
Nearly out of range	2 beeps
Out of range	2 pitch tone
Back in range	4 rapid beeps
Receiver volume up/ down	1 beep
Mute on	2 pitch tone (8 sec repeat)
Mute off	1 beep
Ringer (EH device)	Multi tone (2 sec repeat)

4. Troubleshooting

Q. I have connected my headset base to my telephone terminal but the headset is not working.

A. Make sure that the battery has been properly charged.

Q. The headset is working but I cannot hear telephone calls correctly.

A. Ensure that you have the correct wiring setting by adjusting the switch on the bottom of the headset base.

Q. When the headset's ON/OFF button is pressed, the handset lifter lifts the handset but I cannot hear the call on the headset.

A. Ensure that the headset base is connected to the telephone's handset port and not the headset port (If the telephone has one).

Health and safety instructions

Please read the following safety and operational instructions before using your ZuM eco-Set™ DECT Headset. Please keep these instructions for your reference. When using this device, these basic safety precautions and warnings should be followed to reduce the risk of fire, electric shock, injury, and/or damage to property.

General

Operating, charging and storage temperature is 32°F to 104°F (0°C to 40°C).

Warnings

- ✓ CHILDREN. Never allow children to play with the product – small parts may be a choking hazard.
- ✓ Plug the base station's AC adapter into the nearest, easily accessible, outlet.
- ✓ To reduce the risk of electric shock, explosion, or fire, use only the supplied charger or Class 2 AC adapter to charge the headset. Ensure that the voltage rating (e.g. 120V, 60 Hz) corresponds to the power supply you intend to use.
- ✓ Do not disassemble the headset, base station, or AC adapter as this may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock or fire when you subsequently try to use the device.
- ✓ Do not insert anything into any part of the ZuM eco-Set™ headset because this may cause damage to the internal components or injury to you.

- ✓ Avoid contact with liquids. Do not locate the ZuM eco-Set™ headset near water, for example, near a bathtub, or sink, in a wet basement, or near a swimming pool.
- ✓ Discontinue use of the headset and contact Spracht Customer Service if the product overheats, has a damaged cord or plug, if the product has been dropped or damaged, or if the product has come into contact with liquids.
- ✓ This product should never be placed over or near a heat register and should not be placed in locations without proper ventilation.
- ✓ If you experience a skin irritation after using ZuM eco-Set™ headset, discontinue use and contact Spracht Customer Service.
- ✓ Exposure to high volume sound levels or excessive sound pressure may cause temporary or permanent damage to your hearing. Although there is no single volume setting that is appropriate for everyone, you should always set the headset volume at moderate levels and avoid prolonged exposure to high volume sound levels. The louder the volume, the less time is required before your hearing could be affected. You may experience different sound levels when using your headset with different devices. The device you use and its settings affect the level of sound you hear. If you experience hearing discomfort, you should stop using the headset and have your hearing checked by your doctor.

To protect your hearing, some hearing experts suggest you:

1. Set the volume control to a low level before placing the headset on your ear and then use as low volume as possible.
2. Avoid turning up the volume to block out noisy surroundings. Whenever possible, use your headset in a quiet environment with low background noise.
3. Limit the amount of time you use headsets at high volume levels.
4. Turn the volume down if the sound from the headset prevents you from hearing people speaking near you.

To avoid the risk of electric shock, explosion, fire or leakage of corrosive or toxic chemicals, please observe the following charging and battery warnings:

Charging warnings

- Use only the supplied charger to charge the product. Do not use the charger for any other purpose. Ensure that the voltage rating corresponds to the power supply you intend to use.
- Charge the headset according to the instructions in this guide.
- Plug the base station's AC adapter into the nearest, easily accessible, outlet.
- Never charge the battery where the temperature may fall below 32°F (0°C) or rise above 104°F (40°C) – for example in an unattended motor vehicle.
- Avoid charging the battery while it is unattended.

Headset battery warnings

The headset is equipped with a replaceable battery. To reduce the risk of fire or injury to yourself or to others read and follow these instructions.

- Do not attempt to dispose of the battery in a fire. The battery may explode. Check local laws for disposal instructions.
- Do not open or mutilate the battery. There may be corrosive materials which can cause damage to eyes or skin and may be toxic if swallowed.
- Charge the headset according to the instructions in this guide.

RECYCLING: the battery used in your headset must be recycled or disposed of properly. For instructions on proper disposal of your headset, contact your local recycling center.

IMPORTANT SAFETY INSTRUCTIONS

Do not use this equipment in places where volatile or explosive materials may be present. This equipment will be inoperable if AC power fails. For indoor use only.

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- Do not use this product near water, for example a bathtub, sink, or laundry area, in a wet basement, or near a swimming pool.
- Avoid using a telephone (other than a cordless type) during an electrical storm.
- There may be a remote risk or electric shock from lightning.
- Do not use the telephone to report a gas leak in the vicinity of the leak.
- Use only the power cord and batteries indicated in this manual. Do not dispose of batteries in a fire. They may explode. Check with local codes for possible special disposal instructions.

CAUTION: There is risk of explosion if the battery is replaced by an incorrect type.

Dispose of used batteries according to instructions.

Use only with ZuM eco-Set™ batteries (3.7 V, 200 mAh Li-ion rechargeable battery).

The supplied AC adaptor with ferrite must be used with this device to ensure compliance with the class B FCC limits.

FFC Declaration

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this equipment not expressly approved Spracht could void your warranty and your ability to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocated the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain the compliance with FCC's RF exposure guideline, place the base unit at least 7.9 in (20 cm) from anyone nearby.

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains, among other information, a product identifier. If requested, this number must be provided to the telephone company.

An applicable Universal Service Order Codes (USOC) certified jack for the equipment is provided (i.e RJ9) in the packaging with each piece of approved terminal equipment. A plug and jack used to connect this equipment to the installation location's wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant.

See installation instructions for details.

If this device causes harm to the telephone network, the telephone company will notify you in an advance that temporary discontinuation of service may be required. But if advance notice isn't practical, the telephone company will notify you as soon as possible. Also, you will be advised of your rights to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

Should you experience trouble with this device, please contact:

Spracht

974 Commercial Street, Suite 108, Palo Alto, CA 94303 USA

Phone: (650) 215-7500

www.spracht.com

For repair or warranty information: If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved. Please follow instructions for repairing, ie.g battery replacement section, otherwise, do not attempt repair of any part of the device.

I) Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

II) Notice: If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this device does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer. This equipment is hearing aid compatible.

Save these instructions

www.spracht.com

Europe Declaration

This product is CE marked according to the provisions of the R and TTE directive (99/5/EC).

This product is in compliance with the essential requirements and other relevant provisions of the directive 1999/5/EC.

Safety:..... EN60950-01:2006+A11:2009

EMC:..... EN301489-6 V1.3.1:2008-08

..... EN301489-1 V1.8.1:2008-04

..... EN55022:2006+A1

..... EN55024:1998+A1+A2

..... EN61000-3-2:2006

..... EN61000-3-3:5005+A1+A2

RF: EN301406 V2.1.1:2009-07

RF Safety: EN50360:2001 (Headset)

..... EN50385:2002 (Base)

Only to be used together with the delivered certified AC adaptor with a GS mark.

Within the EU this product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, United Kingdom, Cyprus, Czech Republic, Estonia, Hungary, Latvia, Lithuania, Malta, Poland, Slovakia, and Slovenia, and within the EFTA, in Iceland, Norway, and Switzerland.

