

ZUM 3500™ Stereo 3.5mm and USB Headset

3.5mm Pin Connector and USB Adapter for Computers, Smartphones and Tablets



Stereo Output Audio

Designed for high demand use. Bass-enhanced 40mm wideband stereo speakers deliver excellent sound quality. Combined with a noise canceling microphone, they deliver high quality audio. Plug-and-Play compatibility for all Windows, Mac and Linux systems so no special software or drivers are needed. Just plug them in and they're ready to use.

Durable, Easy to Use and Comfortable

Comfortable and bendable over-the-head headband with a bendable microphone boom. In-line controller includes a mute function along with volume control. Professional quality materials for durability and comfort.

ZUM 3500™ FEATURES

- 01** Compatibility: Computers, PC/MAC, via USB; Smartphones and Tablets, iOS and Android, using 3.5mm pin. Not for Deskphones.
- 02** Plug-and-Play, no drivers.
- 03** Powerful 40mm wide-band bass enhanced speakers.
- 04** Full stereo output rather than standard binaural of a telephone headset.
- 05** Noise canceling microphone.
- 06** Skype™ and other VoIP applications compatible; not compatible with Skype for Business (Lync).

Part#	ZUM3500	
UPC	800807320239	
MSRP:	\$59.99	



Smart Phone



PC/Mac



Desktop Phone



ZūM 3500™ Stereo 3.5mm and USB Headset

3.5mm Pin Connector and USB Adapter for Computers, Smartphones and Tablets

Specifications

TECHNICAL SPECIFICATIONS

Sensitivity: 116dB \pm 3dB (3mW/1CM)
Microphone Sensitivity: -47dB (0dB=1V/Pa)
Microphone Frequency Range: 100~10,000Hz
Speaker size: 1.57" (40mm) Diam
Speaker Impedance: 32 Ω \pm 15%
Frequency Response: 140–20,000Hz
Microphone Impedance: 2200 Ω
USB Data Resolution: 16 bit

PHYSICAL SPECIFICATIONS


Dimensions: 6.5" x 5.3" x 2.1" (16.5 x 13.5 x 5.5)cm
External Microphone: .23" x .2" (6 x 5)mm
Weight: 3.5oz (100g)
Cord Length: 5' (1.5m) normal, 9.8' (3m) extended
Packaging: 7.5" x 10" x 2" (190 x 254 x 51)mm
Package Weight: 5.6oz (160g)

CONTROLS

Volume UP/DOWN
 Microphone MUTE/UNMUTE

PACKAGE INCLUDES

ZūM 3500™ Headset
 USB adapter
 User Guide

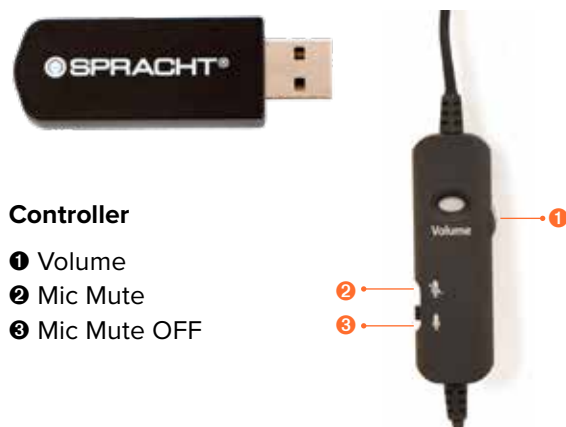

Controller

- ❶ Volume
- ❷ Mic Mute
- ❸ Mic Mute OFF



Retail Packaging