

Aura Professional UC™ Conference Phone

Desktop PSTN and Softphone for PC/Mac via USB



A CONFERENCE PHONE WITH ALL YOU NEED

Connect it to your landline (PSTN) for standard conferencing or as a Softphone with your PC/Mac via USB. You can even add in external mics, a power amplifier, or mixing console using the auxiliary audio ports.

The Aura Professional UC™ has everything you need to sound professional, without the high price tag. It lets you conference using a range of devices making it a versatile and flexible choice.

Part #	CP-3012
UPC	800807300484
MSRP	\$529.99



For Deskphone



Not for Smartphones



For PC and Mac computers

AURA PROFESSIONAL UC™ FEATURES


- 01** Compatibility: Analog PSTN line and Softphone for PC/Mac using USB.
- 02** Call mute, call hold, three-way calling in all modes.
- 03** Wide-band acoustic echo cancellation with HD voice, dynamic noise suppression, automatic gain control, voice band equalization and intelligent microphone mixing.
- 04** Make Zoom, Teams, Google Meet and other VoIP app conference calls using your PC/Mac.
- 05** PSTN direct dial, redial, rapid dial, recall, second flash.
- 06** 3 line LCD displays caller ID.
- 07** Switch from analog phone calls to USB VoIP calls seamlessly.

Aura Professional UC™ Conference Phone

Desktop PTSN and Softphone via USB for PC/Mac



- | | |
|---|----------------------------|
| 1 Microphone Mute | 6 OK (Accept) button |
| 2 Call Hold | 7 Menu |
| 3 Standard keypad | 8 Caller ID |
| 4 Redial and Flash buttons | 9 Ring Volume adjust |
| 5 Green and Red microphone indicator LEDs | 10 Volume up/down switches |

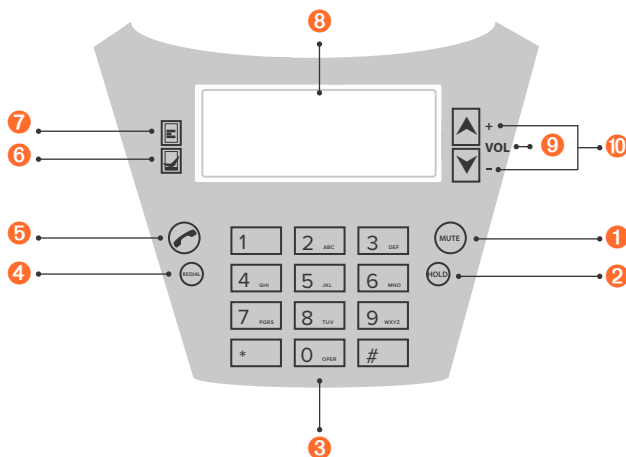

Package Includes:

- 1 Conference Phone
- 2 Audio Transfer Adapter
- 3 USB Cable
- 4 AC Adapter
- 5 RJ-11 Cable
- 5 Line In/Line Out Cable
- 5 Power Extension Cable
- 6 Junction Box
- 7 Users Guide (not Shown)



Specifications

FEATURES

- Wide-band acoustic echo cancellation with HD voice, dynamic noise suppression, automatic gain control, voice band equalization and intelligent microphone mixing.
- Four internal uni-directional microphones.
- USB VoIP, suitable for PC/Mac, Video systems, UC communications.
- Built in 4-way conferencing.
- Auxillary port allows external devices to connect.
- Speaker volume up to 90dB.

AUDIO SPECIFICATIONS

DSP based deep echo cancellation: -65dB
 Echo Tail: 500ms
 Bi-directional Noise Suppression: -18dB
 LEC : - 25 dB, length 32ms
 USB VoIP

ELECTRICAL SPECIFICATIONS

USB Connector: Standard B type
 Voice frequency response: 100Hz - 16kHz

TELEPHONE SPECIFICATIONS

Telephone Connection: Analog PBX or standard analog PSTN line
 Telephone Connector: Standard RJ-11
 Audio Frequency Band: 200Hz - 3400Hz
 Certifications: FCC part 15 Class A, A-Tick, Canadian, UL, VCCI, RoHS


MECHANICAL SPECIFICATIONS

Dimensions Phone: 13.3" L & W x 2.5" H (33.8 cm x 6.3 cm)
 Weight: 1lb. 10oz (740g)
 Package: 14" x 14" x 4" (35.5cm x 35.5cm x 10.2cm)
 Package Weight: 4 lb (1.9 kg)
 Operating Temperature: 32° F - 122°F (0°C - 50°C)

COMPATIBILITY



Mac and Windows



Desktop PSTN
or Analog PBX

